arXiv:1208.0811v1 [cs.DC] 3 Aug 2012

Distributed Algorithms for Maximum Link Scheduling under the Physical Interference Model

Guanhong Pei[1] and V.S. Anil Kumar[2]
[1]Dept. of ECE, and Virginia Bioinformatics Institute, Virginia Tech, USA
[2]Dept. of CS, and Virginia Bioinformatics Institute, Virginia Tech, USA

Abstract

A fundamental problem in wireless networks is the *maximum link scheduling* problem: given a set L of links, compute the largest possible subset $L' \subseteq L$ of links that can be scheduled simultaneously without interference. This problem is particularly challenging in the physical interference model based on SINR constraints (referred to as the SINR model), which has gained a lot of interest in recent years. Constant factor approximation algorithms have been developed for this problem, but low complexity distributed algorithms that give the same approximation guarantee in the SINR model are not known. Distributed algorithms are especially challenging in this model, because of its non-locality.

In this paper, we develop a set of fast distributed algorithms in the SINR model, providing constant approximation for the maximum link scheduling problem under uniform power assignment. We find that different aspects of available technology, such as full/half-duplex communication, and non-adaptive/adaptive power control, have a significant impact on the performance of the algorithm; these issues have not been explored in the context of distributed algorithms in the SINR model before. Our algorithms' running time is $O(g(L)\log^c m)$, where $c = 1, 2, 3$ for different problem instances, and $g(L)$ is the "link diversity" determined by the logarithmic scale of a communication link length. Since $g(L)$ is small and remains in a constant range in most cases, our algorithms serve as the first set of "sublinear" time distributed solution. The algorithms are randomized and crucially use physical carrier sensing in distributed communication steps.

1 Introduction

One of the most basic problems in wireless networks is the *Maximum Link Scheduling* problem (MAXLSP): given a set L of links, compute the largest possible subset $L' \subseteq L$ of links that can be scheduled simultaneously without conflicts; this is also referred to as the one-shot scheduling [11] or max independent link set problem [27]. Different interference models have been developed for capturing conflicts in wireless networks, most of which are based on the idea of "conflict graphs" [24]. MAXLSP is challenging under most of these models — the decision version of this problem is NP-Complete under many models, and constant factor approximation algorithms are known for many interference models [24]. In recent years, a more realistic interference model based on SINR constraints (henceforth referred to as the SINR model) [11] has gained a lot of interest. This model is much harder to analyze than models based on conflict graphs [3].

Since link scheduling is a common subroutine in many other problems, distributed algorithms with low complexity are crucial. Efficient (i.e., polylogarithmic time) distributed algorithms have been developed for many graph based interference models (generically referred to as the "Radio Broadcast Network (RBN)" model) for fundamental problems, including independent sets, coloring and dominating set, e.g., [20, 26]. In the RBN model, a receiver faces a collision if transmissions from multiple senders reach it simultaneously. Algorithms in this model rely on having spatial separation between senders to ensure interference free communication.

In this paper, we focus on distributed algorithms

for MAXLSP in the SINR model. Even centralized algorithms for this problem are much harder in the SINR model, than in the disk based interference model; recent work by [10, 14–16, 27] gives constant factor approximation algorithms for various instances of MAXLSP in the SINR model. The centralized algorithms of [10, 15, 27] are based on a greedy ordering of the links, which requires estimating the "affectance," (which, informally, is a measure of interference), at each stage (this is discussed formally later in Section 3) — this is one of the challenges in distributed solutions to MAXLSP. We note that efficient time distributed algorithms for scheduling all the links (i.e., the coloring version) is already known [13]. Adapting them would immediately yield a distributed $O(\log m)$-approximation to MAXLSP, but it is not clear how to obtain a distributed $O(1)$-approximation. Further, an important aspect of MAXLSP is that the senders and receivers of all the links should know whether they have been chosen, since this is an important requirement in many networking applications; this seems to be difficult to ensure through random access based approaches.

Our contributions. In this paper, we develop a set of fast distributed $O(1)$-approximation for MAXLSP, in which all nodes are constrained to use uniform power levels for data transmission (we refer to this as MAXLSP$^{\mathrm{U}}$), improving upon the results implied by [2, 8]. Our algorithms and the proofs build on ideas from [10, 15, 27] and [25], and one of the key technical contributions of our work is the notion of a "ruling", and its computation in the SINR model (discussed below). Our results raise two new issues in the context of distributed algorithms in the SINR model — adaptive power control (i.e., the feature of using lower than the maximum power level, as needed), and full/half duplex communication (i.e., whether nodes can transmit and receive simultaneously). We find these features impact the performance of the algorithms quite a bit. We summarize some of the key aspects of the results and main challenges below.

(1) In the case of "non-adaptive power control" (i.e., if all nodes are required to use fixed uniform power levels), we design a distributed algorithm that provably runs in $O(g(L)\log^3 m)$ time and gives an $O(1)$ approximation to the optimum solution for half duplex communication, and we improve the running time to $O(g(L)\log^2 m)$ for the case of full duplex communication; here $g(L)$ denotes the "link diversity", which is the logarithm of the ratio of the largest to the smallest link length (this is defined formally in Section 3). If nodes are capable of "adaptive power control" (i.e., they can use varying power levels for scheduling, but not data transmission), we improve the running time of the above algorithm to $O(g(L)\log^2 m)$ time for half duplex communication, and $O(g(L)\log m)$ time for full duplex communication. Note that in the adaptive power control case, the algorithm uses varying power levels during its run, but the links which are selected finally use the fixed uniform power level for data transmission.

(2) One of our key ideas is the parallelization of the centralized link selection step of [10, 15, 27], which requires sorting all links, processing a larger set of links simultaneously, and efficient filtering based on spatial and interference constraints in parallel. Moreover, it turns out that the usual notion of independence based on spatially separated nodes is inadequate because of the spatial separation of the sender and the receiver of a link: it is the senders which makes the distributed decision of transmission and the participation in the independent set, while the SINR model is receiver-oriented and it is hard for each sender of a candidate link to determine the interference caused by the chosen links at the corresponding receiver. One of the important steps of our algorithm involves the distributed construction of a "ruling" (first introduced in [7]) which relates to the notion of independence and aids the solution to MIS and coloring problems in graph topologies [4, 22]. The extension of the notion of ruling and its computation in the SINR model is one of the important technical contributions of our paper. We believe this basic construct would be useful in other link and topology control problems.

(3) Our algorithms crucially use physical carrier sensing and the distributed decisions are made based on the Received Signal Strength Indication (RSSI) — this approach was used by Scheideler et al. [25] for distributed constant density dominating set construction. This aspect is another distinction from distributed algorithms in the RBN model. Further, our algorithm uses constant size messages, and all the steps can be implemented within the model without

any additional capabilities or assumptions (e.g., such as those made in [2]).

Organization. We discuss the network model and relevant definitions in Section 3. We present the high-level distributed algorithm in Algorithm 1 with a constant approximation ratio in Section 4. We introduce and analyze the distributed algorithm to compute a ruling in Section 5. In Section 6 we show the detailed implementation for each step of the high-level Algorithm 1; we present a second method to implement Algorithm 1 in Section 7, improving the running time by a logarithmic factor.

2 Related Work

There has been a lot of research on link scheduling and various related problems, because of their fundamental nature. Two broad versions of these problems are: scheduling the largest possible set of links from a given set (maximum independent set), and constructing the smallest schedule for all the links (minimum length schedule). These problems are well understood in graph based interference models and efficient approximation algorithms are known for many versions; see, e.g., [24]. Distributed algorithms are also known for node and link scheduling (and many related problems) in the radio broadcast model [1, 18–20, 26]. These algorithms are typically randomized and based on Luby's algorithm [18], and run in synchronous polylogarithmic time. There are varying assumptions on the kind of information and resources needed by individual nodes. For instance, [18] require node degrees at each step (which might vary, as nodes become inactive). Moscibroda et al. [20] develop algorithms that do not require the degree information, and run in $O(\log^2 n)$ time. In recent work, Afek et al. [1] develop a distributed algorithm for the maximal independent set problem, which only requires the an estimate of the total number of nodes, but not degrees.

Link scheduling in the SINR model is considerably harder than in graph based models. Several papers developed $O(g(L))$-approximations for MAXLSP$^{\mathrm{U}}$, e.g., [6, 11], which have been improved to constant factor approximations by [10, 15, 27] for uniform power assignments. Some of these papers use "capacity" [10, 15] to refer to the maximum link scheduling; however, we prefer to avoid the term capacity in order to avoid confusion with the total throughput in a network, which has been traditionally referred to as the capacity (e.g., [12]). Recently, Halldórsson and Mitra [14] extend the $O(1)$ approx. ratio to a wide range of oblivious power assignments for both uni- and bi-directional links (including uniform, mean and linear power assignments). This has been improved by Kesselheim [16], who developed the first $O(1)$-algorithm for MAXLSP with power control and an thus an $O(\log m)$-algorithm for the minimum length schedule problem. Most of the results except those using uniform power assignments, assume unlimited power values; otherwise the results may degrade by a factor depending on the ratio of the maximum and minimum transmission power values.

Most of the above algorithms for scheduling in the SINR model are centralized and it is not clear how to implement them in a distributed manner efficiently. The closest results to ours are by Ásgeirsson and Mitra [2] and Dinitz [8], using game theoretic approaches; the former obtains a constant approx. ratio improving over the latter's $O(d_{max}^{2\alpha})$ approximation for MAXLSP$^{\mathrm{U}}$. Their running time can be much higher than ours, and they require additional assumptions (such as acknowledgements without any cost), which might be difficult to realize in the SINR model.

For the minimum length schedule problem (MINLSP) (where one seeks a shortest schedule to have all the links in L transmit successfully) under a length-monotone sub-linear power assignment, Fanghänel et al. [9] develop a distributed algorithm with an approximate ratio of $O(g(L))$ times a logarithmic factor. Recently, Kesselheim and Vöcking [17] propose an $O(\log^2 m)$-approximate algorithm for any fixed length-monotone and sub-linear power assignment. The approx. ratio of that algorithm has been improved to $O(\log m)$ (matching the best performance of known centralized algorithms) by the analysis of Halldórsson and Mitra [13], who also prove that if all links uses the same randomized strategy, there exists a lower-bound of $\Omega(\log m)$ on the approx. ratio. However, it is not clear how to use these results for MINLSP to get a constant factor approximation for MAXLSP, in which the senders and receivers of all links know their status.

3 Preliminaries and Definitions

Table 1: Notation.

G	network graph	$d(u,v)$	dist. of u and v
V	set of nodes	L	set of links
n	#nodes	$g(L)$	link diversity
m	#links	$OPT()$	optimum instance
α	path-loss exponent	$x(l)$	sender of link l
β	SINR threshold	$r(l)$	receiver of link l
N	background noise	$d(l)$	length of link l
A	affectance	SP	sensed power

We let V denote a set of tranceivers (henceforth, referred to as nodes) in the Euclidean plane. We assume L is a set of links with end-points in V, which form the set of communication requests for the maximum link scheduling problem at any given time, and $|L| = m$. Links are directed, and for link $l = \big(x(l), r(l)\big)$, $x(l)$ and $r(l)$ denote the transmitter (or sender) and receiver respectively. For a link set L', let $X(L')$ denote the set of senders of links in L'. Let $d(u,v)$ denote the Euclidean distance between nodes u, v. For link l, let $d(l) = d(x(l), r(l))$ denote its link length. For links l, l', let $d(l', l) = d(x(l'), r(l))$. Let d_{min} and d_{max} denote the smallest and the largest transmission link lengths respectively. Let $B(v,d)$ denote the ball centered at node v with a radius of d. Each transmitter $x(l)$ uses power $P(l)$ for transmission on link l; we assume commonly used path loss models [6, 11], in which the transmission on link l is possible only if:

$$\frac{\frac{P(l)}{d^{\alpha}(l)}}{N(1+\phi)} \geq \beta, \tag{1}$$

where $\alpha > 2$ is the "path-loss exponent", $\beta > 1$ is the minimum SINR required for successful reception, N is the background noise, and $\phi > 0$ is a constant (note that α, β, ϕ and N are all constants).

We partition the set of transmission links into non-overlapping link classes. We define *link diversity* $g(L) = \lceil \log_2 \frac{d_{max}}{d_{min}} \rceil$. Partition $L = \{L_i\}, i = 1, 2, \ldots, g(L)$, where each $L_i = \{l \mid 2^{i-1} d_{min} \leq d(l) < 2^i d_{min}\}$ is the set of links of roughly similar lengths. Let $d_i = 2^i d_{min}$, such that d_i is an upperbound of link length of L_i; and $\forall i, \forall l \in L_i$, we define $\hat{d}(l) = d_i$. In a distributed environment, nodes use their shared estimates of minimum and maximum possible link length to replace d_{min} and d_{max}, as stated in the previous section. $g(L)$ in most cases $\leq 6 \log 10$ and remains a constant*; further, as discussed earlier, each link can compute which link class it belongs to. The *reverse link* of a link l, denoted by $\overleftarrow{l}$, is the same link with transmission direction inverted. For a link set L', We use $\overleftarrow{L'}$ to denote the set of reverse links of L'.

Wireless Interference. We use physical interference model based on geometric SINR constraints (henceforth referred to as the SINR model), where a subset $L' \subseteq L$ of links can make successful transmission simultaneously if and only if the following condition holds for each link $l \in L'$:

$$\frac{\frac{P(l)}{d^{\alpha}(l)}}{\sum_{l' \in L' \setminus \{l\}} \frac{P(l')}{d^{\alpha}(l', l)} + N} \geq \beta. \tag{2}$$

Such a set L' is said to be *independent* in the context.

The Maximum Link Scheduling Problem (MAXLSP). Given a set of communication requests (links) L, the goal of the MAXLSP problem is to find a maximum independent subset of links that can be scheduled simultaneously in the SINR model. MAXLSP$^{\text{U}}$ is an instance of MAXLSP where links in a solution use a uniform power level for data transmission; note that this does not necessarily restrict scheduling to uniform power. In this paper, we use $OPT(L)$ to denote an optimum solution to the MAXLSP$^{\text{U}}$, and thus $|OPT(L)|$ is the cardinality of the largest such independent set. As discussed earlier, computing $OPT(L)$ is NP-hard, and we focus on approximation algorithms. We say an algorithm gives a C-approximation factor if it constructs an independent link set $L' \subseteq L$ with $|L'| \geq |OPT(L)|/C$.

Distributed Computing Model in the SINR-based Model. Traditionally, distributed algorithms for wireless networks have been studied in the radio broadcast model [5, 20, 26] and its variants. The

* The minimum link length is constrained by the device dimension, empirically at least 0.1 meter; the maximum link length depends on the type of the network, and is usually bounded by 10^5 meters. For example, the Wi-Fi transmission range is below hundred meters and even long-distance Wi-Fi networks [23] have an experimental limit of hundred kilometers; in cellular networks the coverage is at most tens of kilometers; the transmission range in Bluetooth or 60GHz networks is smaller. This implies often $g(L) \leq \log 10^6$.

SINR based computing model is relatively recent, and has not been studied that extensively. Therefore, we summarize the main aspects and assumptions underlying this model: (1) The network is synchronized and for simplicity we assume all slots have the same length. (2) All nodes have a common estimate of m, the number of links, within a polynomial factor; (3) For each link $l \in L$, $x(l)$ and $r(l)$ have an estimate of $d(l)$, but they do not need to know the coordinates or the direction in which the link is oriented; (4) All nodes share a common estimate of d_{min} and d_{max}, the minimum and maximum possible link lengths; (5) We assume nodes have physical carrier sensing capability and can detect if the sensed signal exceeds a threshold. As discussed in [25], this can be done using the RSSI measurement possible through the Clear Channel Assessment capability in the 802.11 standard. Given a threshold $Thres$, we assume that a node is able to detect if the sensed power strength is $\geq Thres$.

Sensed Power-strength and Affectance. For ease of analysis based on links, we define *affectance*[†] as that in [14, 15]: the affectance, caused by the sender of link l' to the receiver of link l, is $A(l', l) = \frac{\beta}{1 - \frac{d^\alpha(l)}{P/(\beta N)}} \frac{d^\alpha(l)}{d^\alpha(l', l)}$. Likewise, we have affectance from a set L' of links, as $A(L', l) = \sum_{l' \in L'} A(l', l)$. It can be verified that Inequality (2) is equivalent to $A(L' \setminus \{l\}, l) \leq 1$, signifying the success of data transmission on l.

To simplify the analysis based on nodes, we define *sensed power-strength* $SP(w, v)$, as the signal power that node v receives when only w is transmitting (which includes background noise); that is, $SP(w, v) = P/d^\alpha(w, v) + N$. Likewise, we have SP from a node set W: $SP(W, v) = \sum_{w \in W} P/d^\alpha(w, v) + N$. Let $Thres(d) = P/d^\alpha + N$ be a function of distance d, such that for a node v, if any other node is transmitting in a range of d, its sensed power will exceed $Thres(d)$.

Node Capabilities for Distributed Scheduling (1) *Half/full Duplex Communication*: Wireless radios are generally considered *half duplex*, *i.e.*, with a single radio they can either transmit or receive/sense but not both at the same time. *Full duplex* radios, which are becoming reality, enable wireless radios to perform transmission and reception/sensing simultaneously. (2) *Non-adaptive/adaptive Power*: Although links in a solution to MAXLSP$^{\text{U}}$ use a uniform power level for data transmission, they are usually capable of using adaptive power which vary across different power levels that may be *used for scheduling*. The capabilities can play a vital role in distributed computation.

[†]Sometimes it shares the same definition with the term *relative interference*, *e.g.*, in [27]; however, "relative interference" may refer to other forms, *e.g.*, in [15].

4 Distributed Algorithm: Overview

In this section, we present the distributed algorithm for MAXLSP$^{\text{U}}$. Because the algorithm is quite complicated, we briefly summarize the sequential algorithm of [10,15,27] below, and then give a high-level description of the distributed algorithm and its analysis, without the implementation details of the individual steps in the SINR model. Section 5 describes the algorithm for computing a ruling in the full and half duplex models. The complete distributed implementation and other details are discussed in Sections 6 and 7, for the non-adaptive and adaptive power control settings, respectively.

4.1 The Centralized Algorithm

We discuss the centralized algorithm adapted from [10,15,27] for MAXLSP$^{\text{U}}$, which forms the basis for our distributed algorithm. The algorithm processes links in non-decreasing order of length. Let L be the initial set of links, and S the set of links already chosen (which is empty initially). Each iteration involves the following steps:

(1) picking the shortest link l in $L \setminus S$ and removing l from L,

(2) removing from L all the links in $\{l' \in L \setminus S : A(S, l') \geq c_0\}$ where $c_0 < 1$ is a constant, *i.e.*, all the links in $L \setminus S$ that suffer from high interference caused by all chosen links in S, and

(3) removing from L all the links in $\{l' \in L \setminus S : d(l', l) = c_1 d(l)\}$ where c_1 is a constant, *i.e.*, all the nearby links of l in $L \setminus S$.

The results of [10, 15, 27] show that: S is feasible (i.e., the SINR constraints are satisfied at every link), and $|S|$ is within a constant factor of the optimum.

Consider a link l that is added to S in iteration i. The proof of feasibility of set S involves showing that for this link l, the affectance due to the links added to S after iteration i is at most $1 - c_0$, so that simultaneous transmission by all the links in S does not cause high interference for l. The approximation factor involves the following two ideas: (1) for any link $l \in S$, there can be at most $O(1)$ links in $OPT(L)$ which are within distance $c_0 d(l)$, and (2) in the set of links removed in step 2 due to the affectance from S, there can be at most $O(1)$ links in $OPT(L)$. We note that the second and third steps are reversed in [27], while [15] does not use the third step. However, we find it necessary for our distributed algorithm, which uses the natural approach of considering all the links in a given length class simultaneously (instead of sequentially). Our analysis builds on these ideas, and property (1) holds for our case without any changes. However, property (2) is more challenging to analyze, since many links are added in parallel. Another complication is that the distributed implementation has to be done from the senders' perspective, so that the above steps become more involved.

4.2 Additional Definitions

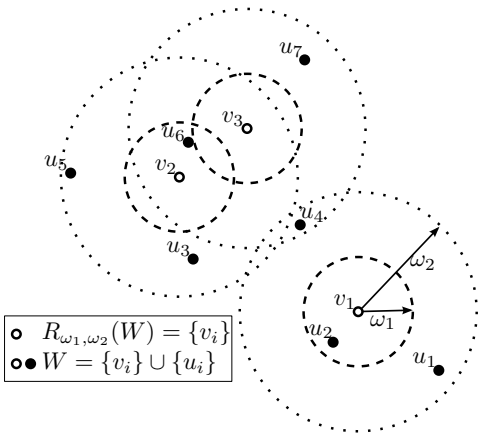


Figure 1: Example of an (ω_1, ω_2)-ruling: $W = \{v_i\} \cup \{u_i\}$ is the set of all dots (open and dark), while $R_{\omega_1,\omega_2}(W) = \{v_i\}$ which is the set of all the open dots denotes a (ω_1, ω_2)-ruling of W. Note that all the nodes in W are ω_2-covered by $R_{\omega_1,\omega_2}(W)$, while all the nodes in $R_{\omega_1,\omega_2}(W)$ are ω_1 away from each other.

Cover and Ruling. Let W, W' denote two node sets. We say a node u is *ω-covered* by W', if and only if $\exists u' \in W', d(u, u') \leq \omega$; based on that, we say W is *ω-covered* by W', or equivalently W' *ω-covers* W, if and only if every node in W is ω-covered by W'. An *(ω_1, ω_2)-ruling* (where $\omega_1 < \omega_2$) of W, introduced in [7], is a node set denoted by $R_{\omega_1,\omega_2}(W)$, such that
(1) $R_{\omega_1,\omega_2}(W) \subseteq W$;
(2) all the nodes in $R_{\omega_1,\omega_2}(W)$ are at least ω_1-separated; that is, $\forall u, u' \in R_{\omega_1,\omega_2}(W)$, $d(u, u') \geq \omega_1$; and
(3) W is ω_2-covered by $R_{\omega_1,\omega_2}(W)$.
Here, we have adopted a generalized definition by considering Euclidean distance rather than graph distance. The concept of ruling has a vital role in our algorithm: it is used for choosing a set of spatially separated links and removing the nearby links of the chosen links. Figure 1 gives an example to illustrate these notions.

4.3 High-level Description of the Distributed Algorithm

We have provided a detailed discussion of the centralized algorithms and basic ideas in Section 4.1; now we discuss the distributed algorithm at a high level (Algorithm 1), and prove the main properties. We use the following constants in the algorithm $\gamma_1 = \left(\frac{36\beta}{1-\psi}\frac{\alpha-1}{(\alpha-2)}\frac{1+\phi}{\phi}\right)^{1/\alpha} + 2$ and γ_2 as an arbitrary constant $> \gamma_1$, where α, β, ϕ are constants in described in Inequality (1) and ψ is a constant that can take any value from $(0, 1)$. The algorithm sweeps through the link classes in $g(L)$ phases. In the ith phase, where $i \in [1, g(L)]$, it selects a subset of links from L_i to include in S, and removes a subset of links from $\cup_{j>i} L_j$ to speed up later phases; the comments in Algorithm 1 explain each step. Step 1 in line 5-8 of the algorithm eliminate links which do not satisfy affectance constraints — its implementation is formally described in Sections 6 and 7, and crucially relies on the measurement of the received power at each sender. Step 2 in line 9 of the algorithm constructs the distributed ruling, which is discussed in Section 5 for the non-adaptive power case, and extended to the adaptive case in Section 7.

Lemma 4.1 (Correctness)**.** *The algorithm results in an independent set S.*

Lemma 4.1 shows the correctness and is proved in Appendix A.1. Algorithm 1 results in a constant ap-

Algorithm 1: Distributed Maximum Link Scheduling

input : Set L of links
output: One-shot Schedule S

1 $J \leftarrow L$;
2 **foreach** $i = 1, 2, \ldots, g(L)$ **do** `/* for each link class in` L `*/`
3 $J_i \leftarrow L_i \cap J$, $J_i^{>} \leftarrow \cup_{j>i} L_j \cap J$, $\omega_1 \leftarrow \gamma_1 d_i, \omega_2 \leftarrow \gamma_2 d_i$;
`/* 1st step (Lines 4-6): check affectance constraints, s.t. links in` S_i `are not subject to high interference by links of smaller lengths chosen in previous phases. Note: we use reverse` l `to check affectance at` $x(l)$ `*/`
4 **if** $i > 1$ **then**
5 $J_i^a \leftarrow \{l \in J_i : A(\cup_{j<i} S_j, \overleftarrow{l}) \leq \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha}\}$, $\overline{J_i^a} \leftarrow J_i \setminus J_i^a$;
6 $J_i^b \leftarrow \{l \in J_i^{>} : A(\cup_{j<i} S_j, \overleftarrow{l}) \leq \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha}\}$, $\overline{J_i^b} \leftarrow J_i^{>} \setminus J_i^b$;
`/* 2nd step (Lines 7 & 8): check spatial constraints, to obtain an` (ω_1, ω_2)`-ruling` $X(J_i^r)$ `of` $X(J_i^a)$`, s.t. the selected links (`J_i^r`) are spatially separated and nearby links (`J_i^z`) of similar or larger lengths are excluded */`
7 construct link set J_i^r, s.t. $X(J_i^r)$ is an (ω_1, ω_2)-ruling of $X(J_i^a)$;
8 construct link set J_i^z, s.t. (1) $J_i^z \cap J_i^a = J_i^a \setminus J_i^r$ and (2) $\{l \in J_i^b : x(l)$ is ω_1-covered by $X(J_i^r)\} \subseteq J_i^z \cap J_i^b \subseteq \{l \in J_i^b : x(l)$ is ω_2-covered by $X(J_i^r)\}$;
`/* 3rd step (Lines 9 & 10): select and discard links */`
9 $S_i \leftarrow J_i^r$, $J \leftarrow J \setminus J_i^r$; `/* select links */`
10 $J \leftarrow J \setminus (\overline{J_i^a} \cup \overline{J_i^b} \cup J_i^z)$; `/* discard links */`
11 $S \leftarrow \cup_i S_i$, Return S;

proximation ratio shown in Theorem 4.2; its proof is in Appendix A.2, where this theorem is backed by Lemma A.2 and A.3 in Appendix A.2. The two lemmas, independent of Algorithm 1, stands on its own to provide insights of how an optimum solution is shaped under the SINR model; they can be proved by using a combination of techniques found in [15, 27]. We provide their proofs in Appendix A.2 to make the paper complete and help the reading.

Theorem 4.2 (Approximation Ratio)**.** $\forall \gamma_1, \gamma_2, \psi > 0$, $|OPT(L)| \leq C_3(\gamma_2, \psi)|S|$ *if* $\gamma_2 > \gamma_1 > 1$, *where* $C_3(\gamma_2, \psi) = C_1(\gamma_2) + C_2(\psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha})$, *where* $C_1(x) = \frac{(2x+1)^{\alpha}}{\beta}$ *and* $C_2(x) = (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha}-1})^{\alpha}/x + 1$. *are functions with constant output values for constant input arguments.*

5 Distributed Algorithm: (ω_1, ω_2)-Ruling

In this section, we present Algorithm 2, the distributed algorithm to compute an (ω_1, ω_2)-ruling, for full duplex communication under the physical interference model; in the end of the section, we extend it to the half duplex setting (where a node can perform transmission and reception/sensing at the same time) with added running time. While this algorithm can be interesting by itself, it serves as a significant building block for our distributed implementation. For the algorithm to function properly, we require the input parameter $\omega_2 \geq (36\frac{\alpha-1}{\alpha-2})^{\alpha-2}\omega_1$. Recall that $B(v, d)$ denotes the ball centered at v with a radius of d. Let n be the total number of nodes. The last input parameter b_{max} denote the estimate of the maximum number of nodes in the ball $B(v, \omega_1)$ of any node $v \in W_1$; in the worst case, $b_{max} \leq n$.

In this algorithm, we call an iteration of the outer loop (Line 1) a *phase*; we call an iteration of the inner loop (Line 2) a *round*, consisting of the *coordination step* (Lines 4 through 8) and the *decision step* (Lines 9 through 12). A node v is said to be *active* if v has not joined either $\hat{R}$ or $\hat{Z}$; otherwise, v becomes *inactive*.

In each round, the coordination step provides a probabilistic mechanism for active nodes to compete to get in the ruling (at Line 5). Lines 6 through 8 constitute a module to resolve the issue of sensing and transmitting at the same time, such that two nearby nodes do not both enter the ruling (*i.e.*, Lemma 5.3). Next, during the decision step, a subset of active nodes decide to join $\hat{R}$ or $\hat{Z}$.

In each phase, there are $C_4 \log n$ rounds, such that we can ensure a fraction of the node population

Algorithm 2: ConstructR$(\omega_1, \omega_2, W_1, W_2, b_{max})$: Distributed algorithm for computing an (ω_1, ω_2)-ruling with full duplex radios.

input : $\omega_1, \omega_2, W_1, W_2, b_{max}$
output: $(\hat{R}, \hat{Z})$: an (ω_1, ω_2)-ruling of W_1
`/* Each` $v \in W_1 \cup W_2$ `does the following */`
1 **for** $i_{out} = 0$ *to* $\log b_{max} + 1$ **do**
2 **for** $i_{in} = 1$ *to* $C_4 \log n$ **do**
3 **if** v *is active* **then**
 `/* Coordination Step (Lines 4-8): 1 slot */`
4 $U(v) \leftarrow 0$;
5 **if** $v \in W_1$ **then** $U(v)$ flips to 1 w/ prob. $\frac{2^{i_{out}-2}}{b_{max}}$;
6 **if** $U(v) = 1$ **then**
7 v transmits and senses, $I(v) \leftarrow$ the power v receives in this slot;
8 **if** $I(v) > Thres(\omega_1)$ **then** $U(v) \leftarrow 0$;
 `/* Decision Step (Lines 9-12): 1 slot */`
9 **if** $U(v) = 1$ **then** v transmits, v joins $\hat{R}$; `/* inactive */`
10 **else**
11 v senses, $I(v) \leftarrow$ the power v receives in this slot;
12 **if** $I(v) > Thres(\omega_1)$ **then** v joins $\hat{Z}$; `/* inactive */`
13 **return** $(\hat{R}, \hat{Z})$;

have either joined $\hat{R}$ or $\hat{Z}$, and we expect the maximum number of active nodes in the nearby region of any active node to decrease by a half (proved in Lemma B.3 in Appendix B.1). After each phase, the probability for each active node to access the channel and compete doubles (at Line 5). After the total of $\log b_{max} + 2$ phases, we have Lemmas 5.2, 5.4, 5.5 that lead to Theorem 5.1.

Theorem 5.1 (Correctness)**.** *Algorithm 2 terminates in $O(\log n \log b_{max})$ time. By the end of the algorithm: (1) $\hat{R}$ forms an (ω_1, ω_2)-ruling of W_1, and (2) $\hat{Z} \cap W_1 = W_1 \setminus \hat{R}$ and $\{v \in W_2 : v$ is ω_1-covered by $\hat{R}\} \subseteq \hat{Z} \cap W_2 \subseteq \{v \in W_2 : v$ is ω_2-covered by $\hat{R}\}$*, w.h.p.

Theorem 5.1 follows directly from the lemmas below. Lemmas 5.2, 5.3 and 5.5 prove that $\hat{R}$ is an (ω_1, ω_2)-ruling of W_1, *w.h.p.* Lemmas 5.2, 5.4, 5.5 together shows that $\hat{Z}$ complements $\hat{R}$ in W_1 and partially in W_2 with desired properties, *w.h.p.* To help the reading flow, we defer much of the technical content — the proof of Lemma 5.2 (which involves Lemmas B.1, B.2 and B.3) and the proof of Lemma 5.5 — to Appendix B.

Lemma 5.2 (Completion)**.** *By the end of the algorithm, all nodes in W_1 have joined either $\hat{R}$ or $\hat{Z}$,* i.e.*, all nodes in W_1 become inactive,* w.h.p.

Lemma 5.2 implies that $\hat{Z} \cap W_1 = W_1 \setminus \hat{R}$. We say a node $v \in \hat{R}$ is "*good*," if and only if $d(v, v') \geq \omega_1, \forall v' \in \hat{R}$ and $v' \neq v$. In Algorithm 2, When a node enters $\hat{R}$, it makes sure that there are no other ones entering $\hat{R}$ within a range of ω_1, and it deactivate all the active nodes in the same range. Therefore, we have the following Lemmas 5.3 and 5.4.

Lemma 5.3 (Quality of $\hat{R}$)**.** *All nodes in $\hat{R}$ are good, with probability of 1.*

Lemma 5.4 (Quality of $\hat{Z}$: Part 1)**.** *$\hat{Z}$ contains all the nodes in $W_1 \cup W_2 \setminus \hat{R}$ that are ω_1-covered by $\hat{R}$, with probability of 1.*

Lemma 5.5 (Quality of $\hat{Z}$: Part 2)**.** *Further, suppose all nodes in $\hat{R}$ are good, then all nodes in $\hat{Z}$ are ω_2-covered by $\hat{R}$, $\forall \omega_2 \geq (36\frac{\alpha-1}{\alpha-2})^{\frac{1}{\alpha-2}}\omega_1$.*

Half Duplex Communication. Now, we assume that nodes are in the half duplex mode, so that they cannot perform transmission and reception/sensing at the same time. In Algorithm 2, Lines 6 through 8 make use of the full duplex capability, such that Lemma 5.3 is true. To account for the case of half duplex communication, if we replace the one-slot deterministic full duplex mechanism (Lines 6 through 8) with a randomized $O(\log n)$-time loop — illustrated by the following lines of pseudo code — we have Lemma 5.6 for half duplex communication as the counterpart of Lemma 5.3 for full duplex. The cost incurred includes (1) the increase in the total running time to obtain an (ω_1, ω_2)-ruling by $O(\log n)$, and (2) a weakened statement in Lemma 5.6 compared to Lemma 5.3.

In replacement of Lines 6 through 8 in Algorithm 2 for using half duplex radios.

1 **for** $j = 1$ *to* $C_5 \log n$ **do** `/* resolving half duplex communication */`
  `/* in each slot */`
2 **if** $U(v) = 1$ **then** v transmits with prob. $1/2$;
3 **if** v *does not transmit* **then**
4 v senses, $I(v) \leftarrow$ the power v receives in this slot;
5 **if** $I(v) > Thres(\omega_1)$ **then** $U(v) \leftarrow 0$;
  `/* stops */`

Lemma 5.6 (Quality of $\hat{R}$: Half Duplex Mode)**.** *All nodes in $\hat{R}$ are good,* w.h.p.

Since Lemmas 5.2, 5.4 and 5.5 remain valid, we obtain the following theorem for the half duplex case.

Theorem 5.7 (Half Duplex)**.** *There exists a modified version of* $\text{ConstructR}(\omega_1, \omega_2, W_1, W_2, b_{max})$ *for the half duplex case, such that it finishes in $O(\log^2 m \log b_{max})$ time and by the end of the algorithm: (1) $\hat{R}$ forms an (ω_1, ω_2)-ruling of W_1, and (2) $\hat{Z} \cap W_1 = W_1 \setminus \hat{R}$ and $\{v \in W_2 : v$ is ω_1-covered by $\hat{R}\} \subseteq \hat{Z} \cap W_2 \subseteq \{v \in W_2 : v$ is ω_2-covered by $\hat{R}\}$,* w.h.p.

6 Distributed Implementation with Non-adaptive Uniform Transmission Power for Scheduling

Putting everything together, we present in this section the distributed implementation of Algorithm 1 when restricted to using one uniform power level for scheduling.

Theorem 6.1 (Performance)**.** *Our distributed implementation of Algorithm 1 with non-adaptive uniform transmission power has the following properties:*
(1) in half duplex mode, it terminates in $O(g(L) \log^3 m)$ time,
(2) in full duplex mode, it terminates in $O(g(L) \log^2 m)$ time, and
(3) in both modes, it produces a constant-approximate solution to MAXLSP$^{\text{U}}$.

For the ith phase of Algorithm 1, we present the distributed implementation that works even when there is only one fixed power level available. We assign γ_2 a constant value $\geq (36\frac{\alpha-1}{\alpha-2})^{\alpha-2}\gamma_1$, and let $\omega_1 = \gamma_1 d_i$, and $\omega_2 = \gamma_2 d_i$. The distributed implementation goes as follows.

Algorithm 4: $\text{CheckA}(Y, Y', S)$: Distributed algorithm for checking affectance.

input : Link sets Y, Y', S
output: $Y^a = \{x(l) : l \in Y, A(S,l) \leq \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^\alpha\}$,
$Y^b = \{x(l) : l \in Y', A(S,l) \leq \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^\alpha\}$,
$\overline{Y^a} = \{x(l) : l \in Y, A(S,l) > \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^\alpha\}$,
$\overline{Y^b} = \{x(l) : l \in Y', A(S,l) > \psi(1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^\alpha\}$
`/* in 1 time slot: */`
1 **if** $l \in S$ **then** $x(l)$ transmits;
2 **else if** $l \in Y \cup Y'$ **then**
3 $x(l)$ senses, $SP(X(S), x(l)) \leftarrow$ the power $x(l)$ receives;
4 **if** $SP(X(S), x(l)) \leq Thres\big((\frac{\beta(1-\frac{d(l)}{P/(\beta N)})}{\psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^\alpha})^{1/\alpha} d(l)\big)$ **then**
5 **if** $l \in Y$ **then** $x(l)$ joins Y^a; **if** $l \in Y'$ **then** $x(l)$ joins Y^b;
6 **else**
7 **if** $l \in Y$ **then** $x(l)$ joins $\overline{Y^a}$; **if** $l \in Y'$ **then** $x(l)$ joins $\overline{Y^b}$;
8 **return** $Y^a, Y^b, \overline{Y^a}, \overline{Y^b}$;

Distributed Implementation: 1st Step: With Algorithm 4, we run $\text{CheckA}(J_i, J_i^>, \cup_{j<i} S_j)$ to implement the 1st step for phase i in Algorithm 1. $\forall l \in J_i \cup J_i^>$, on Line 3 of Algorithm 4, we get $SP(X(S), x(l)) = \sum_{l' \in \cup_{j<i} S_j} \frac{P}{d^\alpha(l', \overleftarrow{l})} + N$. Then,

since

$$SP(X(S), x(l))$$
$$\leq Thres\big((\frac{\beta(1-\frac{d(l)}{P/(\beta N)})}{\psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha}}\big)^{1/\alpha} d(l)\big)$$

is equivalent to

$$A(\cup_{j<i} S_j, \overleftarrow{l}) = \frac{\beta}{1-\frac{d^{\alpha}(l)}{P/(\beta N)}} \sum_{l' \in \cup_{j<i} S_j} \frac{d^{\alpha}(l)}{d^{\alpha}(l', \overleftarrow{l})}$$
$$\leq \psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha},$$

the sets of links whose sender nodes are in $Y^a, Y^b, \overline{Y^a}, \overline{Y^b}$ correspond to $J_i^a, J_i^b, \overline{J_i^a}, \overline{J_i^b}$ in Algorithm 1 respectively.

Distributed Implementation: 2nd Step: Recall that for a link set L', $X(L')$ is the set of all sender nodes. To implement the 2nd step for phase i in Algorithm 1. we feed $b_{max} = m$ to Algorithm 2 and run $\text{ConstructR}(\omega_1, \omega_2, X(J_i^a), X(J_i^b), m)$. Thus, we obtain an (ω_1, ω_2)-ruling $\hat{R}$ of $X(J_i^a)$ and $\hat{Z}$ that complements $\hat{R}$ in $O(\log^3 m)$ time for half duplex and $O(\log^2 m)$ time for full duplex, Then, the sets of links whose sender nodes are in $\hat{R}, \hat{Z}$ respectively correspond to $X(J_i^r), X(J_i^z)$ in Algorithm 1.

Distributed Implementation: 3rd Step: The 3rd step of Algorithm 1 means all the links in class L_i and those longer links removed in the 1st step exit Algorithm 1. Because our algorithm is sender based, the corresponding links will quit upon the decision of their sender nodes in the 1st and the 2nd steps.

7 Distributed Implementation with Adaptive Transmission Power for Scheduling

In this section, suppose we have multiple power levels at our disposal on each node[‡]; we present how this aids the distributed implementation of Algorithm 1.

[‡] In this paper we only study MAXLSP$^{\text{U}}$ where links in a solution use a uniform power level for data transmission; this does not necessarily restrict scheduling control to using uniform power. The general version of the problem MAXLSP that explores power control in both scheduling and data transmission in a distributed setting is a hard problem and remains open.

Theorem 7.1 (Performance)**.** *Our distributed implementation of Algorithm 1 with adaptive transmission power has the following properties:*
(1) in half duplex mode, it terminates in $O(g(L)\log^2 m)$ time,
(2) in full duplex mode, it terminates in $O(g(L)\log m)$ time, and
(3) in both modes, it produces a constant-approximate solution to MAXLSP$^{\text{U}}$.

Again, note that these adaptive power levels are only for scheduling in the control phase; for data transmission in the resulting independent set S we still use one uniform power level. Specifically, we require that (1) nodes have access to a set of $\Theta(g(L))$ power levels; and (2) for each $i \in [1, g(L)]$, there exists a power level P_i to use such that $(\frac{P_i}{\beta N})^{1/\alpha} = \gamma_3 d_i$, where γ_3 is a constant.

We present a second method to implement the 2nd step of each phase in Algorithm 1, reducing the running time by one logarithmic factor, by (1) performing a preprocessing to reduce b_{max} to some constant C_9 in $O(\log m)$ time, (2) running Algorithm 2 with the constant C_9 in $O(\log^2 m)$ time with half duplex radios and $O(\log m)$ time with full duplex radios, and (3) performing a postprocessing to obtain the sets of links required as a result of 2nd step of Algorithm 1 in one slot. We reuse the implementation for the 1st and the 3rd steps from the previous section. Due to space limit, we put the details in Appendix C.

8 Conclusion

In this paper, we present the first set of fast distributed algorithms in the SINR model with a constant factor approximation guarantee for MAXLSP$^{\text{U}}$. We extensively study the problem by accounting for the cases of half/full duplex and non-adaptive/adaptive power availability for scheduling. The non-local nature of this model and the asymmetry between senders and receivers makes this model very challenging to study. Our algorithm is randomized and crucially relies on physical carrier sensing for the distributed communication steps, without any additional assumptions. Our main technique of distributed computation of a ruling is likely to be useful in the design of other distributed algorithms in the SINR model.

References

[1] Y. Afek, N. Alon, O. Barad, E. Hornstein, N. Barkai, and Z. Bar-Joseph. A biological solution to a fundamental distributed computing problem. *Science*, 331:183–185, 2011.

[2] E. Ásgeirsson and P. Mitra. On a game theoretic approach to capacity maximization in wireless networks. In *IEEE INFOCOM*, 2011.

[3] C. Avin, Y. Emek, E. Kantor, Z. Lotker, D. Peleg, and L. Roditty. Sinr diagrams: towards algorithmically usable sinr models of wireless networks. In *ACM PODC*, pages 200–209, 2009.

[4] B. Awerbuch, M. Luby, A. V. Goldberg, and S. A. Plotkin. Network decomposition and locality in distributed computation. In *IEEE Symposium on Foundations of Computer Science (FOCS)*, pages 364–369, 1989.

[5] H. Balakrishnan, C. Barrett, V. S. Anil Kumar, M. Marathe, and S. Thite. The distance 2-matching problem and its relationship to the MAC layer capacity of adhoc wireless networks. *IEEE Journal on Selected Areas in Communications*, 22(6):1069–1079, 2004.

[6] Deepti Chafekar, V. S. Anil Kumar, Madhav V. Marathe, Srinivasan Parthasarathy 0002, and Aravind Srinivasan. Cross-layer latency minimization in wireless networks with sinr constraints. In *ACM MobiHoc*, pages 110–119, 2007.

[7] R Cole and U Vishkin. Deterministic coin tossing and accelerating cascades: micro and macro techniques for designing parallel algorithms. In *ACM symposium on Theory of computing (STOC)*, pages 206–219, 1986.

[8] M. Dinitz. Distributed algorithms for approximating wireless network capacity. In *IEEE INFOCOM*, 2010.

[9] Alexander Fanghänel, Thomas Kesselheim, and Berthold Vöcking. Improved algorithms for latency minimization in wireless networks. In *Internatilonal Collogquium on Automata, Languages and Programming (ICALP)*, pages 447–458, 2009.

[10] Olga Goussevskaia, Magnús Halldórsson, Roger Wattenhofer, and Emo Welzl. Capacity of arbitrary wireless networks. In *IEEE INFOCOM*, 2009.

[11] Olga Goussevskaia, Yvonne Anne Oswald, and Roger Wattenhofer. Complexity in geometric sinr. In *ACM MobiHoc*, 2007.

[12] P. Gupta and P. R. Kumar. The capacity of wireless networks. *IEEE Trans. on Info. Theory*, 46(2):388–404, 2000.

[13] Magnús M. Halldórsson and Pradipta Mitra. Nearly optimal bounds for distributed wireless scheduling in the sinr model. In *ICALP*, 2011.

[14] Magnús M. Halldórsson and Pradipta Mitra. Wireless capacity with oblivious power in general metrics. In *ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2011.

[15] Magnús M. Halldórsson and Roger Wattenhofer. Wireless communication is in apx. In *ICALP*, 2009. Corrected version: `http://www.hr.is/faculty/mmh/papers/juniform.pdf`.

[16] Thomas Kesselheim. A constant-factor approximation for wireless capacity maximization with power control in the sinr model. In *ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 2011.

[17] Thomas Kesselheim and Berthold Vöcking. Distributed contention resolution in wireless networks. In *DISC*, 2010.

[18] M Luby. A simple parallel algorithm for the maximal independent set problem. In *ACM STOC*, 1985.

[19] Yves Metivier, John Michael Robson, Nasser Saheb-Djahromi, and Akka Zemmari. An optimal bit complexity randomized distributed mis algorithm. In *SIROCCO*, pages 323–337, 2009.

[20] Thomas Moscibroda and Roger Wattenhofer. Maximal independent sets in radio networks.

In *ACM symposium on Principles of distributed computing (PODC)*, 2005.

[21] Thomas Moscibroda, Roger Wattenhofer, and Aaron Zollinger. Topology control meets sinr: the scheduling complexity of arbitrary topologies. In *ACM MobiHoc*, pages 310–321, 2006.

[22] Alessandro Panconesi and Aravind Srinivasan. Improved distributed algorithms for coloring and network decomposition problems. In *ACM symposium on Theory of computing (STOC)*, pages 581–592, 1992.

[23] Rabin Patra, Sergiu Nedevschi, Sonesh Surana, Anmol Sheth, Lakshminarayanan Subramanian, and Eric Brewer. WiLDNet: Design and implementation of high performance WiFi based long distance networks. In *USENIX NSDI*, pages 87–100, 2007.

[24] S. Ramanathan and E. L. Lloyd. Scheduling algorithms for multihop radio networks. *IEEE/ACM Trans. on Netw.*, 1:166–177, 1993.

[25] C. Scheideler, A. Richa, and P. Santi. An $o(\log n)$ dominating set protocol for wireless ad-hoc networks under the physical interference model. In *ACM MobiHoc*, pages 91–100, 2008.

[26] Johnnes Schneider and Roger Wattenhofer. A log* distributed maximal independent set algorithm for growth-bounded graphs. In *ACM symposium on Principles of distributed computing (PODC)*, 2005.

[27] Peng-Jun Wan, Xiaohua Jia, and Frances Yao. Maximum independent set of links under physical interference model. In *Proceedings of WASA*, pages 169–178, 2009.

A Appendix to Section 4

A.1 Proof of Lemma 4.1

The statement of Lemma 4.1 is equivalent to that $\forall l \in S, A(S \setminus \{l\}, l) \leq 1$. Let l be an arbitrary link in S, and w.l.o.g., we assume $l \in S_i$, and thus $l \in L_i$. In each phase $j < i$, because $\overline{J_j^a} \cup \overline{J_j^b} \cup J_j^r \cup J_j^z \supseteq J_j$, all the links in $\cup_{j<i} L_j$ have been removed from J at the end of phase j. Due to the 2nd step, $A(\cup_{j<i} S_j, \overleftarrow{l}) \leq \psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha}$. First, we show that $A(\cup_{j<i} S_j, l) \leq \psi$.

For any link $l' \in \cup_{j<i} S_j$,

$$A(l', \overleftarrow{l}) = \frac{\beta}{1 - \frac{d^{\alpha}(\overleftarrow{l})}{P/(\beta N)}} \frac{d^{\alpha}(\overleftarrow{l})}{d^{\alpha}(l', \overleftarrow{l})} \leq A(\cup_{j<i} S_j, \overleftarrow{l}) < 1.$$

Hence, $d(x(l'), x(l)) = d(l', \overleftarrow{l}) \geq (\frac{\beta d^{\alpha}(l)}{1-\frac{d^{\alpha}(l)}{P/(\beta N)}})^{1/\alpha} \geq (\frac{\beta(1+\phi)}{\phi})^{1/\alpha} d(l)$, implying $\frac{d(l',l)}{d(l',\overleftarrow{l})} = \frac{d(x(l'),r(l))}{d(x(l'),x(l))} \geq \frac{d(x(l'),x(l))-d(l)}{d(x(l'),x(l))} \geq 1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha}$. By referring to the definition of affectance — $A(\cup_{j<i} S_j, l) = \sum_{l' \in \cup_{j<i} S_j} \frac{\beta}{1-\frac{d^{\alpha}(l)}{P/(\beta N)}} \frac{d^{\alpha}(l)}{d^{\alpha}(l',l)}$ and $A(\cup_{j<i} S_j, \overleftarrow{l}) = \sum_{l' \in \cup_{j<i} S_j} \frac{\beta}{1-\frac{d^{\alpha}(\overleftarrow{l})}{P/(\beta N)}} \frac{d^{\alpha}(\overleftarrow{l})}{d^{\alpha}(l',\overleftarrow{l})}$ — we obtain

$$A(\cup_{j<i} S_j, l) \leq \Big(\frac{1}{1 - (\frac{\phi}{\beta(1+\phi)})^{1/\alpha}}\Big)^{\alpha} A(\cup_{j<i} S_j, \overleftarrow{l}) = \psi.$$

Next, it suffices to show that

$$A(\cup_{j \geq i} S_j \setminus \{l\}, l) \leq 1 - \psi.$$

At phase i, $\omega_1 = \gamma_1 d_i$; the 1st step in the phase ensures that when link l is added to S_i, any link $l' \in \cup_{j \geq i} L_j$ with $d(x(l'), x(l)) < \omega_1$ will not get in S_i. Therefore, for the set $\cup_{j \geq i} S_j \setminus \{l\}$, we have: (1) all the nodes in $X(\cup_{j \geq i} S_j \setminus \{l\})$ have a mutual distance of at least ω_1; (2) the distance from any node in $X(\cup_{j \geq i} S_j \setminus \{l\})$ to $r(l)$ is at least $\omega_1 - d(l)$; and (3) $\omega_1 - d(l) > \omega_1/2 > 0$. According to Proposition A.1, by using $\gamma_1 = \big(\frac{36\beta}{1-\psi}\frac{\alpha-1}{(\alpha-2)}\frac{1+\phi}{\phi}\big)^{1/\alpha} + 2$, $SP\big(X(\cup_{j \geq i} S_j \setminus \{l\}), r(l)\big) \leq \frac{36(\alpha-1)}{\alpha-2} \frac{P}{(\omega_1 - d(l))^{\alpha}} + N < \frac{(1-\psi)P}{\beta d^{\alpha}(l)}(1 - \frac{d^{\alpha}(l)}{P/(\beta N)}) + N$. It is easy to verify $A(\cup_{j \geq i} S_j \setminus \{l\}, l) < 1 - \psi$.

Proposition A.1. *$\forall V' \in V$ and $\forall v \notin V'$, if (1) all the nodes in V' are at least ρ_1 away from each other, (2) the distance between v and any node in V' is at least ρ_2, (3) $\rho_2 > \rho_1/2 > 0$, then $SP(V', v) < \frac{36(\alpha-1)}{\alpha-2} \frac{\rho_2^2}{\rho_1^2} \frac{P}{\rho_2^{\alpha}} + N$.*

Proof. We bound the sensed power strength by partitioning the plane into concentric rings all centered at v, each of width ρ_2, via a similar technique to that in [6, 21]. Let $Ring(i)$ denote the ith ring (where $i = 1, 2, \ldots$), which contains every node v' that satisfies $i\rho_2 \leq d(v', v) < (i+1)\rho_2$; let $V'(i)$ denote the subset of nodes in V' that fall in $Ring(i)$. We notice the following facts: (1) For any two nodes $v, v' \in V'(i)$, two disk centered at v, v' respectively with a radius of $\rho_1/2$ are non-overlapping. (2) For any node $v \in V'(i)$, such a disk is fully contained in an extended ring $Ring'(i)$ of $Ring(i)$, with an extra width of $\rho_1/2$ at each side of $Ring(i)$. The area (denoted by D) of each of such disks is $D = \pi(\rho_1/2)^2$. The area (denoted by $D(i)$) of $Ring'(i)$ is

$$D(i) = \pi[((i+1)\rho_2 + \rho_1/2)^2 - (i\rho_2 - \rho_1/2)^2] \leq 3\pi(2i+1)\rho_2^2.$$

Using $|V'(i)| \leq D(i)/D \leq 12(2i+1)\rho_2^2/\rho_1^2$, we obtain

$$SI(V', w) \leq \sum_{i=1}^{\infty} |V'(i)| \frac{P}{(i\rho_2)^{\alpha}} + N \leq \sum_{i=1}^{\infty} \frac{12(2i+1)}{i^{\alpha}} \frac{\rho_2^2}{\rho_1^2} \frac{P}{\rho_2^{\alpha}} + N \leq \frac{36(\alpha-1)}{\alpha-2} \frac{\rho_2^2}{\rho_1^2} \frac{P}{\rho_2^{\alpha}} + N.$$

□

A.2 Proof of Theorem 4.2

For a node v, we define $B(v, d)$ as the ball centered at v with a radius of d. With a parameter $\gamma > 1$, we then define a link set $B_{\gamma}^{\geq}(l)$, such that for a link $l \in L_i$, $B_{\gamma}^{\geq}(l)$ contains all and only the links in $\{L_j : j \geq i\}$, with their senders in the ball $B(x(l), \gamma d_i)$; in other words, $B_{\gamma}^{\geq}(l)$ contains the links with similar or longer lengths, whose senders are (γd_i)-covered by $x(l)$. For a set $L' \subseteq L$, $B_{\gamma}^{\geq}(L')$ is defined as $\cup_{l \in L'} B_{\gamma}^{\geq}(l)$.

Lemma A.2 (Spatial Constraint)**.** $\forall \gamma > 1$, $\forall L' \subseteq L$, $\forall l \in L'$, $|OPT(B^{\geq}_{\gamma}(l) \cap L')| \leq C_1(\gamma)$, *where* $C_1(\gamma) = \frac{(2\gamma+1)^{\alpha}}{\beta}$.

Proof. Let k be an arbitrary link in $OPT(B^{\geq}_{\gamma}(l) \cap L')$. For any link $k' \in OPT(B^{\geq}_{\gamma}(l) \cap L')$, $d(k', k) \leq d(x(k'), x(l)) + d(x(l), x(k)) + d(k) \leq (2\gamma+1)d(k)$. Therefore,

$$\begin{aligned}
1 &\geq A(OPT(B^{\geq}_{\gamma}(l) \cap L') \setminus \{k\}, k) \\
&= \beta \frac{\sum_{k' \in OPT(B^{\geq}_{\gamma}(l) \cap L') \setminus \{k\}} \frac{d^{\alpha}(k)}{d^{\alpha}(k', k)}}{1 - \frac{d^{\alpha}(k)}{P/(\beta N)}} \\
&\geq \beta \frac{|OPT(B^{\geq}_{\gamma}(l) \cap L')| \frac{d^{\alpha}(k)}{(2\gamma+1)^{\alpha} d^{\alpha}(k)}}{1 - \frac{d^{\alpha}(k)}{P/(\beta N)}} \\
&\geq \beta (2\gamma + 1)^{-\alpha} |OPT(B^{\geq}_{\gamma}(l) \cap L')|.
\end{aligned}$$

It follows that $|OPT(B^{\geq}_{\gamma}(l) \cap L')| \leq (2\gamma+1)^{\alpha}/\beta = C_1(\gamma)$. □

Lemma A.3 (Affectance Constraint)**.** $\forall \psi' > 0$ *and* $\forall L', L'' \subseteq L$, *if* $L' \cap L'' = \emptyset$ *and* $A(L', \overleftarrow{l}) > \psi'$ *for any link* $l \in L''$, *then* $|OPT(L'')| \leq C_2(\psi')|L'|$, *where* $C_2(\psi') = (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha}/\psi' + 1$.

Proof. If $|OPT(L'')| > 0$, we can express it as $|OPT(L'')| = b|L'| + g$, such that b and g are non-negative integers and $1 \leq g \leq |L'|$. We create $|L'|$ bins, each of which has a capacity of b links; we pack the links in $OPT(L'')$ to the bins via a first-fit sweep through the links in L':

(1) We order the links in L' arbitrarily; let l_j denote the jth link in L', and let Bin_j denote the jth bin. Let set $L^* = OPT(L'')$ initially; then, the sweep proceeds in $|L'|$ rounds.

(2) In the ith round (where $i = 1, 2, \ldots, |L'|$), we pick b links in L^* whose senders are the nearest b nodes to the sender $x(l_i)$ of the ith link in L', and we remove those b links from L^* and put them into Bin_i.

The completion of the above packing means that in $OPT(L'')$, we have $b|L'|$ links "near", and $g \in [1, |L'|]$ links "far" from the senders of links in L'. If $b \leq (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha}/\beta$, we are done. Therefore, for the rest of the proof we assume that $b > (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha}/\beta$, and we show that $b \leq C_2(\psi') - 1 = (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha}/\psi'$ in this case.

Let l denote a "far" link in $OPT(L'')$ that is out of any bins. We have for any link $k \in Bin_i$, $d(x(k), x(l_i)) < d(x(l), x(l_i))$, implying that $d(x(l), x(k)) < 2d(x(l), x(l_i))$ due to triangle inequality. Since $Bin_i \cup \{l\} \subseteq OPT(L'')$, we have

$$\begin{aligned}
1 \geq A(Bin_i, l) &= \beta \frac{\sum_{k \in Bin_i} \frac{d^{\alpha}(l)}{d^{\alpha}(k,l)}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \\
&\geq \beta \frac{b\big(\frac{d(l)}{2d(x(l), x(l_i)) + d(l)}\big)^{\alpha}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \\
&\geq \beta b \big(\frac{1}{2d(x(l), x(l_i))/d(l) + 1}\big)^{\alpha}.
\end{aligned}$$

That leads to that $d(l) \leq \frac{2}{(\beta b)^{1/\alpha} - 1} d(x(l), x(l_i))$. Then for any link $k \in Bin_i$,

$$\begin{aligned}
&d(k, l) = d(x(k), r(l)) \\
\leq &d(x(k), x(l_i)) + d(x(l_i), x(l)) + d(x(l), r(l)) \\
\leq &\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1} d(x(l_i), x(l)).
\end{aligned} \tag{3}$$

Since $\cup_i Bin_i \cup \{l\} \subseteq OPT(L'')$, we have

$$\begin{aligned}
1 \geq A(\cup_{i=1}^{|L'|} Bin_i, l) &= \beta \sum_{i=1}^{|L'|} \frac{\sum_{k \in Bin_i} \frac{d^{\alpha}(l)}{d^{\alpha}(k,l)}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \\
&\geq \beta \sum_{i=1}^{|L'|} \frac{\frac{|Bin_i| d^{\alpha}(l)}{(\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha} d^{\alpha}(x(l_i), x(l))}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \quad \text{(by Ineq. (3))} \\
&\geq \frac{b}{(\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha} - 1})^{\alpha}} \frac{\beta \sum_{l' \in L'} \frac{d^{\alpha}(l)}{d^{\alpha}(x(l'), x(l))}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \\
&= b(\frac{(\beta b)^{1/\alpha} - 1}{2(\beta b)^{1/\alpha}})^{\alpha} A(L', \overleftarrow{l}) \\
&\geq b(\frac{(\beta b)^{1/\alpha} - 1}{2(\beta b)^{1/\alpha}})^{\alpha} \psi'.
\end{aligned}$$

The last inequality above holds because

$$A(L', \overleftarrow{l}) = \beta \frac{\sum_{l' \in L'} \frac{d^{\alpha}(l)}{d^{\alpha}(x(l'), x(l))}}{1 - \frac{d^{\alpha}(l)}{P/(\beta N)}} \geq \psi'.$$

Therefore, $b \le (\frac{2(\beta b)^{1/\alpha}}{(\beta b)^{1/\alpha}-1})^{\alpha}/\psi'$ and $|OPT(L'')| \le (b+1)|L'| \le C_2(\psi')|L'|$. □

We define $J^a = \cup_i J_i^a, \overline{J^a} = \cup_i \overline{J_i^a}, J^b = \cup_i J_i^b, \overline{J^b} = \cup_i \overline{J_i^b}, J^r = \cup_i J_i^r, J^z = \cup_i J_i^z$. $\overline{J^a} \cup \overline{J^b}$ contains all the links removed in the 1st step in Algorithm 1 due to the affectance constraints. At each phase i, $X(J_i^r)$ is an (ω_1, ω_2)-ruling of $X(J_i^a)$, and all the nodes in $X(J_i^z)$ are ω_2-covered by $X(J_i^r)$; we choose all the links in J_i^r to add to S, discard all the links in $\overline{J_i^a} \cup \overline{J_i^b}$ (for failing affectance check), and also discard all the links in J_i^z (because of their proximity to the chosen links).

We have

$$\begin{aligned} L &= \cup_i(\overline{J_i^a} \cup \overline{J_i^b} \cup J_i^r \cup J_i^z) \\ &\subseteq \cup_i(\overline{J_i^a} \cup \overline{J_i^b}) \cup \cup_i B^{\ge}_{\gamma_2}(J_i^r) \\ &= \overline{J^a} \cup \overline{J^b} \cup B^{\ge}_{\gamma_2}(S). \end{aligned}$$

Due to Lemma A.3, $|OPT(\overline{J^a} \cup \overline{J^b}| \le C_2(\psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha})|S|$; due to Lemma A.2, $|OPT(B^{\ge}_{\gamma_2}(S))| \le \sum_{l\in S}|OPT(B^{\ge}_{\gamma_2}(l))| \le C_1(\gamma_2)|S|$. Therefore,

$$\begin{aligned} &|OPT(L)| \le |OPT(\overline{J^a} \cup \overline{J^b})| + |OPT(B^{\ge}_{\gamma_2}(S))| \\ &\le \big(C_1(\gamma_2) + C_2(\psi(1-(\frac{\phi}{\beta(1+\phi)})^{1/\alpha})^{\alpha})\big)|S|. \end{aligned}$$

B Appendix to Section 5

Recall that we call an iteration of the outer loop (Line 1) a phase of the algorithm, and an iteration of the inner loop (Line 2) a round; recall that $B(v,d)$ denotes the ball centered at v with a radius of d. Let $A_t^{W_1}(v,d)$ denote the set of *active* nodes in set W_1 that fall in the ball $B(v,d)$ at time point t; we will explicitly point t out whenever we use $A_t^{W_1}(v,d)$.

B.1 Proof of Lemma 5.2

The following definitions are only involved in Lemmas B.1 and B.2. Let η be a constant $> \big(6\frac{\alpha-1}{\alpha-2}\big)^{-1/\alpha}$. In one round (which corresponds to one iteration of the inner loop) of Algorithm 2, let $U \in W_1$ be the set of nodes with $U() = 1$ at line 5 in the coordination step. We say an active node $v \in W_1$ is "lucky" in a round, with t_0 being the time that the round starts, if and only if

(1) $v \in U$;
(2) $U \cap A_{t_0}^{W_1}(v, \eta\omega_1) = \{v\}$, *i.e.*, v has no nearby active nodes in U;
(3) $SP(U \setminus A_{t_0}^{W_1}(v,\eta\omega_1), v) < Thres(\omega_1)$, *i.e.*, total power received from faraway active nodes is small.

In a round if v gets lucky, $U(v)$ will remain 1 till the end of that round, and thus will elect to be included in $\hat{R}$ and will cause all nodes in $A_{t_0}^{W_1}(v,\omega_1)$ to get into $\hat{Z}$.

Lemma B.1. *In a round i_{in} of phase i_{out}, with t_1 being the time that the round starts, suppose that for each active node $u \in W_1, |A_{t_1}^{W_1}(u,\omega_1)| \le 2^{\log b_{max} - i_{out}+1}$ at the beginning of the round, then the probability for an arbitrary active node in W_1 to be lucky in the round is at least $2^{-(\log b_{max} - i_{out} + 3 + (2\eta+1)^2)}$.*

Proof. For a round at phase i_{out}, we prove the statement in the following four steps.

(1) First, for any active node $v \in W_1$, the probability for v to be in U is $Prob\big(U(v) = 1\big) = 2^{-(\log b_{max} - i_{out} + 2)}$.

(2) Second, for any active node $v \in W_1$, due to the packing property we upper-bound the size of $A_{t_1}^{W_1}(v,\eta\omega_1)$ as

$$\begin{aligned} \big|A_{t_1}^{W_1}(v,\eta\omega_1)\big| &\le \frac{\pi(\eta\omega_1 + \omega_1/2)^2}{\pi(\omega_1/2)^2}\big|A_{t_1}^{W_1}(v,\omega_1)\big| \\ &= (2\eta+1)^2 2^{\log b_{max} - i_{out}+1}. \end{aligned}$$

Then, because $\log b_{max} + 1 \ge i_{out}$, $2^{\log b_{max} - i_{out}+2} \ge 2$. the probability for all nodes other than v in $A_{t_1}^{W_1}(v,\eta\omega_1)$ to not appear in U (*i.e.*. to remain silent) is

$$\begin{aligned} &Prob\big(A_{t_1}^{W_1}(v,\eta\omega_1) \cap U \setminus \{v\} = \emptyset\big) \\ \ge &\prod_{u \in A_{t_1}^{W_1}(v,\eta\omega_1)} \big(1 - Prob(U(u) = 1)\big) \\ \ge &\big(1 - 2^{-(\log b_{max} - i_{out}+2)}\big)^{|A_{t_1}^{W_1}(v,\eta\omega_1)|} \\ \ge &\big(1 - 2^{-(\log b_{max} - i_{out}+2)}\big)^{(2\eta+1)^2 2^{\log b_{max} - i_{out}+1}} \\ \ge &(1/4)^{(2\eta+1)^2/2} = 2^{-(2\eta+1)^2}. \end{aligned}$$

(3) Third, for any active node $v \in W_1$, we lower-bound the probability that v's received power $SP(U \setminus A_{t_1}^{W_1}(v, \eta\omega_1), v)$ from outside of the ball $B(v, \eta\omega_1)$ is "low" — *i.e.*, below $Thres(\omega_1)$ — by (i) partitioning the plane into concentric rings via a similar technique to that in [6, 21], and (ii) referring to an $(\eta\omega_1, \eta\omega_1)$-ruling and determining the expected number of nodes in each a ring that appear in U, so that we can bound the power received from all the nodes in the rings outside of $B(v, \eta\omega_1)$.

We partition the plane into rings all centered at v, each of width $\eta\omega_1$. Let $Ring(h)$ denote the hth ring, which contains every node v' that satisfies $h\eta\omega_1 \leq d(v', r(l)) < (h+1)\eta\omega_1$, for each $h = 1, 2, \ldots$; let $Ring^a(h)$ denote the set of active nodes in $Ring(h)$. When $h = 0$, $Ring(0)$ corresponds to the ball $B(v, \eta\omega_1)$. Let $R(h)$ denote an $(\eta\omega_1, \eta\omega_1)$-ruling of $Ring^a(h)$. Then by noticing that (i) $Ring^a(h) \subseteq \cup_{v' \in R(h)} A_{t_1}^{W_1}(v', \eta\omega_1)$, and (ii) for any two nodes $v', u' \in R(h), d(v', u') > \eta\omega_1$, we have

$$\begin{aligned}
&\mathbb{E}\left\{\left|U \cap Ring^a(h)\right|\right\} \\
=&\sum_{v' \in Ring^a(h)} \mathbb{E}\{U(v')\} \\
\leq&\sum_{v' \in R(h)} \sum_{u' \in A_{t_1}^{W_1}(v', \eta\omega_1)} \mathbb{E}\{U(u')\} \\
=&\sum_{v' \in R(h)} \left|A_{t_1}^{W_1}(v', \eta\omega_1)\right| \frac{b_{max}}{2^{i_{out}-2}} \\
\leq&\left|R(h)\right|/2.
\end{aligned} \tag{4}$$

To bound the cardinality of $R(h)$, we use the following facts: (i) for any two nodes $v', u' \in R(h)$, two disk centered at v', u' respectively with a radius of $\eta\omega_1/2$ are non-overlapping; and (ii) For any node $v' \in Ring^a(h)$, such a disk is fully contained in an extended ring $Ring'(h)$ of $Ring(h)$, with an extra width of $\eta\omega_1/2$ at each side of $Ring(h)$. Then, by referring to the ratio between the areas of $Ring'(h)$ and a disk, we have $\left|R(h)\right| \leq 8(2h+1)$; Inequality (4) yields $\mathbb{E}\left\{\left|U \cap Ring^a(h)\right|\right\} \leq 4(2h+1)$.

Therefore, v's received power from outside of the ball $B(v, \eta\omega_1)$ is

$$\begin{aligned}
&\mathbb{E}\{SP(U \setminus A_{t_1}^{W_1}(v, \eta\omega_1), v)\} \\
=&\mathbb{E}\Big\{\sum_{h=1}^{\infty} \sum_{v' \in U(h)} \frac{P}{d^\alpha(v', v)} + N\Big\} \\
\leq&\sum_{h=1}^{\infty} \mathbb{E}\left\{\left|U \cap Ring^a(h)\right|\right\} \frac{P}{(h\eta\omega_1)^\alpha} + N \\
\leq&\sum_{h=1}^{\infty} 4\frac{(2h+1)}{h^\alpha} \frac{P}{(\eta\omega_1)^\alpha} + N \\
\leq&\frac{12}{\eta^\alpha} \frac{\alpha-1}{\alpha-2} \frac{P}{\omega_1^\alpha} + N \leq Thres(\omega_1)/2.
\end{aligned}$$

According to Markov's Inequality, we obtain

$$Prob\big(SP(U \setminus A_{t_1}^{W_1}(v, \omega_2), v) \geq Thres(\omega_1)\big) \leq 1/2,$$

thus implying that

$$Prob\big(SP(U \setminus A_{t_1}^{W_1}(v, \omega_2), v) < Thres(\omega_1)\big) \geq 1/2.$$

(4) Finally, combining the above three, the probability that v is lucky is at least $2^{-(\log b_{max} - i_{out} + 3 + (2\eta+1)^2)}$. □

Lemma B.2. *In a round i_{in} of phase i_{out}, with t_1 being the time that the round starts, suppose that for each active node $u \in W_1, \left|A_{t_1}^{W_1}(u, \omega_1)\right| \leq 2^{\log b_{max} - i_{out} + 1}$; then, for an arbitrary active node $v \in W_1$ with $\left|A_{t_1}^{W_1}(v, \omega_1)\right| \geq 2^{\log b_{max} - i_{out}}$, the probability that v becomes inactive by the end of the round is at least a constant C_6, where $0 < C_6 = 2^{-(3+(2\eta+1)^2)} < 1$.*

Proof. In a round of phase i_{out}, a sufficient condition for v to be inactive by the end of the round is that either v or any node in $A_{t_1}^{W_1}(v, \omega_1)$ enters $\hat{R}$, such that v either enters $\hat{R}$ or $\hat{Z}$ and exits the algorithm. Further, that either v or any node in $A_{t_1}^{W_1}(v, \omega_1)$ gets lucky satisfies this condition. Therefore, the probability for v to become inactive in the round is at least

$$\begin{aligned}
&\sum_{v' \in A_{t_1}^{W_1}(v, \omega_1)} Prob(v' \text{ is lucky}) \\
\geq&\left|A_{t_1}^{W_1}(v, \omega_1)\right| 2^{-\left(\log b_{max} - i_{out} + 3 + (2\eta+1)^2\right)} \\
\geq&2^{-\left(3+(2\eta+1)^2\right)}.
\end{aligned}$$

□

Lemma B.3. *Let $E_{i_{out}}$ denote the event that at the end of the phase i_{out}, $\left|A_{t_1}^{W_1}(u,\omega_1)\right| \leq b_{max}/2^{i_{out}}$ for every active node $u \in W_1$, where t_1 is the time that the last round in i_{out} ends. $\forall i_{out}$, $Prob(E_{i_{out}}) \geq 1 - i_{out}/n^{C_7}$, for some positive constant C_7.*

proof by induction. At the end of the phase $i_{out} = 0$, this is trivial. Suppose that for $i_{out} = i \geq 1$ the statement is true; we show that it still holds for $i_{out} = i+1$. At the beginning of phase $i+1$, if we already have event E_{i+1}, we are done; otherwise, let v denote an active node such that $\left|A_{t_2}^{W_1}(v,\omega_1)\right| > \frac{b_{max}}{2^{i+1}}$, where t_2 is the time that the first round in $i+1$ starts. We show $Prob(E_{i+1}) \geq 1 - \frac{i+1}{n^{C_7}}$ as below:

(1) We choose a constant $C_4 \geq \frac{C_7+1}{\log\frac{1}{1-C_6}}$ for the inner loop at Line 2 of Algorithm 2.

(2) Under the induction assumption for phase i, we have: for any round i_{in} during phase $i+1$, with t_3 being the time that this round starts, if $\left|A_{t_3}^{W_1}(v,\omega_1)\right| \leq \frac{b_{max}}{2^{i+1}}$, we are done; otherwise, as long as $\frac{b_{max}}{2^i} \geq \left|A_{t_3}^{W_1}(v,\omega_1)\right| \geq \frac{b_{max}}{2^{i+1}}$, the probability for v to turn inactive during the round is at least C_6 according to Lemma B.2. Then, the probability for v to become inactive by the end of phase $i+1$ (consisting of $C_4 \log n$ rounds) is at least $1-(1-C_6)^{C_4\log n} \geq 1 - 1/n^{C_7+1}$.

(3) By considering both the conditional probability and the fact that there are at most n such nodes as v,

$$\begin{aligned}
&Prob(E_{i+1})\\
\geq& Prob(E_{i+1} \mid E_i) Prob(E_i)\\
\geq& (1-\frac{n}{n^{C_7+1}})(1-\frac{i}{n^{C_7}}) \geq 1 - \frac{i+1}{n^{C_7}}.
\end{aligned}$$ □

At the end of phase $i_{out} = \log b_{max}+1$, with t_4 being the time that the last round in phase i_{out} ends, we have that with probability of at least $1 - \frac{\log b_{max}+1}{n^{C_7}}$, for every active node $u \in W_1$, $|A_{t_4}^{W_1}(u,\omega_1)| \leq 1/2 < 1$. That means that all the nodes in W_1 have joined either $\hat{R}$ or $\hat{Z}$, with probability of at least $1 - \frac{1}{n^{C_7-1}}$, concluding the proof of Lemma 5.2.

B.2 Proof of Lemma 5.5

Proof by contradiction. Suppose there exists a node $v \in \hat{Z}$ that is not ω_2-covered by $\hat{R}$. Therefore, all the nodes in $\hat{R}$ are outside of the ball $B(v,\omega_2)$. We calculate $SP(\hat{R},v)$ and derive the conflict. We notice the following three facts: (1) all the nodes in $\hat{R}$ have a mutual distance of at least ω_1; (2) the distance from any sender node in $\hat{R}$ to v is $> \omega_2$; and (3) $\omega_2 > \omega_1/2 > 0$. Due to Proposition A.1,

$$\begin{aligned}
SP(\hat{R},v) \leq& 36\frac{\alpha-1}{\alpha-2}\frac{P}{\omega_1^2(\omega_2)^{\alpha-2}} + N\\
\leq& 36\frac{\alpha-1}{\alpha-2}\frac{\omega_1^{\alpha-2}}{\omega_2^{\alpha-2}} Thres(\omega_1) \leq Thres(\omega_1).
\end{aligned}$$

According to the condition for v to enter $\hat{Z}$, we must have $SP(\hat{R},v) > Thres(\omega_1)$, where lies the contradiction.

B.3 Proof of Lemma 5.6

Suppose there is "bad" node $v \in \hat{R}$ such that there exists a node $v' \in \hat{R}$ and $d(v,v') < \omega_1$. We call such a v' a "bad" partner of v. The only possible situation for v to have a "bad" partner v' is that v and v' enter $\hat{R}$ in the same round; otherwise, one of them should have been "pushed" into $\hat{Z}$ during the decision step of a round when the other enters $\hat{R}$.

Let u denote an arbitrary node in $\hat{R}$. The necessary and sufficient condition for u to be bad (or to have a bad partner) is that, in the coordination step of the round when u enters $\hat{R}$, there exists at least one active node $u' \in W_1$ such that, (1) $d(u,u') < \omega_1$, (2) u and u' are in U, and (3) u and u' made the same random binary decisions all through the $C_5 \log m$ slots of the coordination step.

W.l.o.g., we assume u enters $\hat{R}$ at round i_{in} in phase i_{out}. Let t_1 denote the time that round i_{in} in phase i_{out} begins. The probability that u is bad equals the probability for at least one other active node $u' \in A_{t_1}^{W_1}(u,\omega_1)$ (*i.e.*, $d(v,v') < \omega_1$) to enter $\hat{R}$ at round i_{in} in phase i_{out}.

$$\begin{aligned}
&Prob(u \text{ is bad})\\
\leq& \sum_{u' \in A_{t_1}^{W_1}(u,\omega_1)} Prob(U(u')=1)\frac{1}{2^{C_5\log m}}\\
\leq& \frac{1}{n^{C_5}}\frac{\left|A_{t_1}^{W_1}(u,\omega_1)\right|}{4^{\log b_{max}-i_{out}+2}}\\
\leq& \frac{1}{n^{C_5}}\frac{\max_{\text{active } w\in W_1}|A_{t_1}^{W_1}(w,\omega_1)|}{4^{\log b_{max}-i_{out}+2}}.
\end{aligned}$$

Further, due to Lemma B.3,

$$Prob\Big(\max_{\text{active } w\in W_1}\big|A_{t_1}^{W_1}(w,\omega_1)\big| \le 2^{\log b_{max}-i_{out}+1}\Big)$$
$$\ge 1-\frac{i_{out}-1}{n^{C_7}} \ge 1-\frac{1}{n^{C_7-1}}.$$

Therefore,

$$Prob(u \text{ is good}) \ge (1-\frac{1}{n^{C_5}})(1-\frac{1}{n^{C_7-1}})$$
$$\ge 1-\frac{2}{n^{\min\{C_5,C_7-1\}}}.$$

Finally, since $\hat{R}$ contains at most n nodes, the probability that there are no bad nodes in $\hat{R}$ is at least $1-\frac{1}{n^{\min\{C_5,C_7-1\}-1}}$.

C Appendix to Section 7

Recall that we assume that the adaptive transmission power for control has the following properties:

(1) nodes have access to a set of $\Theta(g(L))$ power levels; and

(2) for each $i \in [1, g(L)]$, there exists a power level P_i to use such that $(\frac{P_i}{\beta N})^{1/\alpha} = \gamma_3 d_i$, where γ_3 is a constant.

We introduce a new constant $\gamma_4 \ge (36\frac{\alpha-1}{\alpha-2})^{\alpha-2}\gamma_1$, and assign γ_2 a constant value $\ge \gamma_3+\gamma_4$. For the ith phase of Algorithm 1, let $\omega_1 = \gamma_1 d_i$, $\omega_2 = \gamma_2 d_i$, $\omega_3 = \gamma_3 d_i$ and $\omega_4 = \gamma_4 d_i$. We implement the 2nd step of each phase in Algorithm 1 with the following three substeps

C.1 Preprocessing: Constant Density Dominating Set

Scheideler, Richa, and Santi in [25] propose a distributed protocol to construct a *constant density dominating set* of nodes under uniform power assignment within $O(\log m)$ slots. They define $Dom(W, P_t)$ as a dominating set of a node set W with transmission power of P_t on each node, such that W is d_t-covered by $Dom(W, P_t)$, where d_t is the transmission range under P_t. Then, by "constant density", they mean that $Dom(W, P_t)$ is a $O(1)$-approximation of the minimum dominating set of W, such that within the transmission range d_t of each node in W there are at most a constant number C_9 of nodes chosen by $Dom(W, P_t)$.

At phase i of Algorithm 1, after the 1st step of checking affectance, we execute the protocol on the node set $X(J_i^a)$ with power P_i which corresponds to a transmission range of ω_3, and thus obtain a constant density dominating set $Dom(X(J_i^a), P_i)$ out of $X(J_i^a)$. $Dom(X(J_i^a), P_i)$ has the following properties:

(1) $Dom(X(J_i^a), P_i) \in X(J_i^a)$;

(2) **dominating set**: all the node in $X(J_i^a)$ ω_3-covered by $Dom(X(J_i^a), P_i)$; and

(3) **constant density**: $\forall v \in X(J_i^a)$, $1 \le |B(v,\omega_3) \cap Dom(X(J_i^a), P_i)| \le C_9$, where C_9 is a constant.

C.2 Construction of Ruling $X(J_i^r)$

$\text{ConstructR}(\omega_1, \omega_4, Dom(X(J_i^a), P_i), X(J_i^b), C_9)$ produces $\hat{R}$ as an (ω_1, ω_4)-ruling of $Dom(X(J_i^a), P_i)$, and $\hat{Z}$ such that

(1) $\hat{Z} \cap X(J_i^a) = Dom(X(J_i^a), P_i) \setminus \hat{R}$;

(2) $\hat{Z} \cap X(J_i^b) \supseteq \{v \in X(J_i^b) : v \text{ is } \omega_1\text{-covered by } \hat{R}\}$; and

(3) $\hat{Z} \cap X(J_i^b) \subseteq \{v \in X(J_i^b) : v \text{ is } \omega_4\text{-covered by } \hat{R}\}$, *i.e.*, $\hat{Z}$ is ω_4-covered by $\hat{R}$.

We argue that $\hat{R}$ is an (ω_1, ω_2)-ruling of $X(J_i^a)$ due to the following two properties: (1) $\hat{R} \subseteq X(J_i^a)$ and any two nodes in $\hat{R}$ are ω_1-separated, and (2) $X(J_i^a)$ is ω_2-covered by $\hat{R}$. Property (2) can be deduced from the facts below: (1) $X(J_i^a)$ is ω_3-covered by $Dom(X(J_i^a), P_i)$ due to the preprocessing step, (2) $Dom(X(J_i^a), P_i)$ is ω_4-covered by $\hat{R}$ as a result of $\text{ConstructR}(\omega_1, \omega_4, Dom(X(J_i^a), P_i), X(J_i^b), C_9)$, and (3) $\omega_4 + \omega_3 \le \omega_2$ by our construction. Therefore, $\hat{R}$ corresponds to $X(J_i^r)$ in the 2nd step of Algorithm 1.

C.3 Postprocessing: Accounting for $X(J_i^z)$

Construct $\hat{Z}' \triangleq \hat{Z} \cup \Big(X(J_i^a) \setminus \hat{R}\Big)$; the following is true:

(1) $\hat{Z}' \cap X(J_i^a) = X(J_i^a) \setminus \hat{R}$;

(2) $\hat{Z}' \cap X(J_i^b) \supseteq \{v \in X(J_i^b) : v \text{ is } \omega_1\text{-covered by } \hat{R}\}$; and

(3) $\hat{Z}' \cap X(J_i^b) \subseteq \{v \in X(J_i^b) : v \text{ is } \omega_2\text{-covered by } \hat{R}\}$, *i.e.*, $\hat{Z}'$ is ω_2-covered by $\hat{R}$.

Therefore, $\hat{Z}'$ corresponds to $X(J_i^z)$ in the 2nd step of Algorithm 1.